

NEXT TWO

Automatic Spraying Machine

 Spraying

PANEL



makor

PROUDLY MADE IN ITALY

NEXT TWO

Automatic Oscillating Sprayer for Panels



NEXT is targeted for coating medium size production volumes. Thanks to the large booth and its new design, it is capable of painting cabinets and furniture

- components of any kind. Ideal to apply base and top coat, both high gloss and matt.

- Available versions:

-
-
-
-
-
-


✓ NEXT TWO with paper transport and two spray arms.





15" PC DISPLAY - AI VIRTUAL ASSISTANT "MAKY"

New 15" PC Display Windows. Thanks to the wide touch screen display and the intuitive graphical interface, the machine management is easy and fast. Predictive maintenance and teleassistance are included in the standard version.

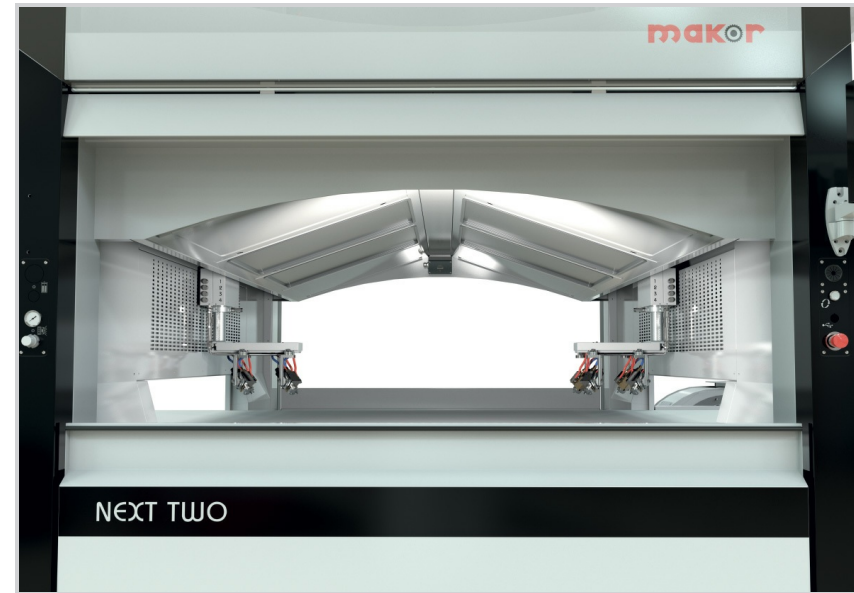


DOUBLE SPRAY ARM

The pressurized booth, with automatic balancing of pressurization based on the filter's status, houses the double reciprocating spray arm (up to 8 guns 4+4), ensures elevated spray quality. 2 circuits are standard – extendable up to a maximum of 4. Gun holding plates and circuits with quick connecting system are available as options.



DOUBLE FILTERING STAGE

Large suction cabinet, one on each side. Double filtering stage, for a total of 7,6 square meters of filters, guarantees high working autonomy. The machine software alerts when the filters need to be changed. Thanks to the supporting wheels, filter replacement and machine access is simplified.

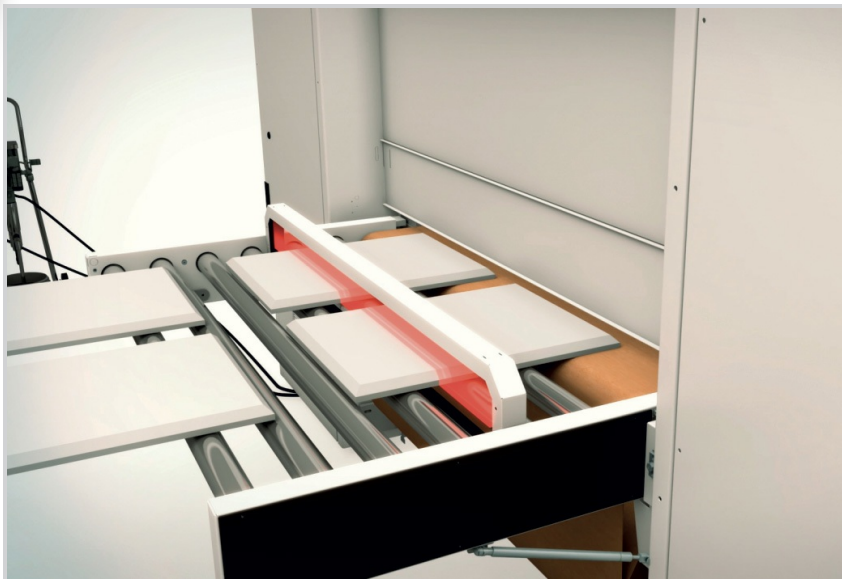

READING BAR

Piece reading device with 12 mm. resolution that allows high paint saving.



COVER ON THE INFEED AND OUTFEED (OPTIONAL)

It is possible to equip the machine with Plexiglass cover both on the infeed and outfeed.



NEW TANK FOR SMALL TOUCH-UP (ON REQUEST - IT REQUIRES ONE LOW PRESSURE CIRCUIT)

New tank for small touch-up with working pressure up to 6 BAR, 2,1 liters capacity, allows saving coating on small batches.



CUTTING-EDGE SECURITY

A double anti-spark sensor guarantees the switch-off of the machine in case of fire.(Mandatory on EC markets with use of solvent paints)




PAPER TRANSPORT SYSTEM

The paper transport system eliminates all maintenance time and costs of the belt cleaning system.
 Very high working autonomy with one paper roller (roller diameter 600 mm – 3,000 m. 1620 mm. wide).
 Paper unwinder and winder wheeled trolley, TOTALLY REDESIGNED, for easy and quick replacement of the paper.



PLANT SOLUTIONS

It is possible to place the machine combined to a pressurized drying booth, or it is possible to position the machine in line with automatic drying systems, out-of-dust ovens, such as Multilevel and others.

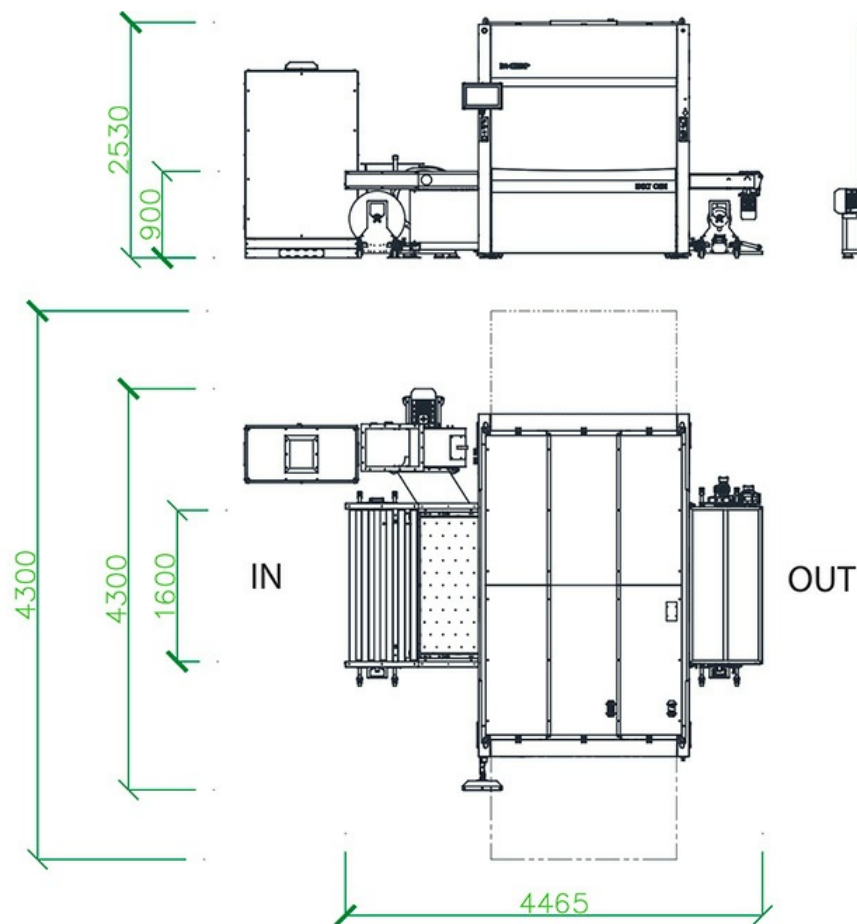

Technical Data

NEXT ONE
NEXT TWO

		Length	Width	Height
Min. work measurements :	mm.	300	25	6
Max work measurements :	mm.	3000	1300	60
Overall Dimensions:	mm.	4465	4300	2530
Installed Total Power:	Kw	11.8		
Feeding Speed:	m/min	2 - 6		

All data mentioned in this publication are for informative purpose only and do not bind in any case Makor srl that reserves the right to make any changes considered necessary for technical or sales reasons. Colours of the machines shown on the picture are merely for example and are not binding. The reproduction, even partial, of this catalogue is forbidden.

NEXT TWO

Makor Srl

Via Casalpiano, 9
53048 Sinalunga
Siena
Italy

(+39) 0577 634011
makor@makor.it



<https://www.makor.it/en/product/next-two/>